



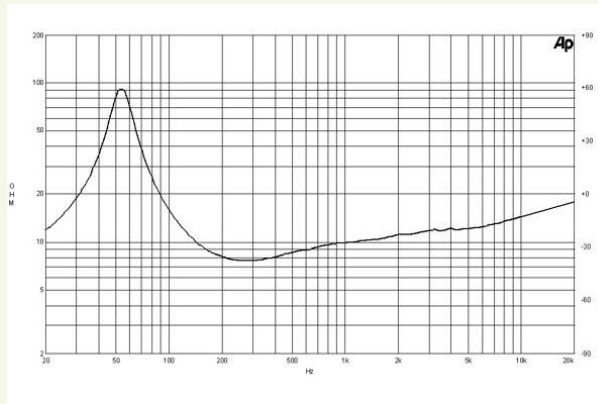

10PS26 | Woofer

700 W continuous program power capacity
 76 mm (3 in) aluminium voice coil
 55 – 4000 Hz response
 96 dB sensitivity
 Shorting copper cap for extended HF response

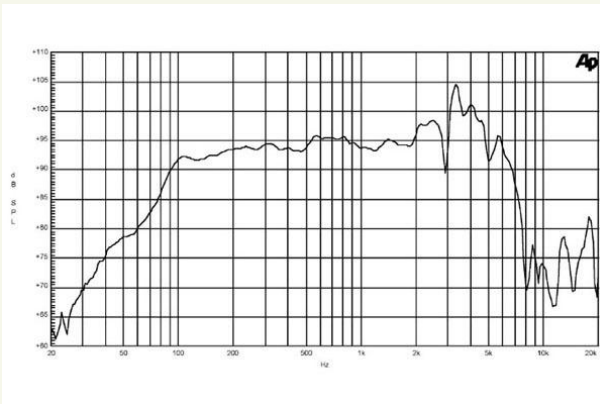

Horns
 HF Drivers
 Coaxials
 LF Nd Drivers
 LF Drivers

Specification

Nominal Diameter	250 (10) mm (in)
Nominal Impedance (1)	8 Ohm
Minimum Impedance	7.1 Ohm
Nominal Power Handling (2)	350 W
Continuous Power Handling (3)	700 W
Sensitivity (1W/1m) (4)	96 dB
Frequency Range	55 - 4000 Hz
Voice Coil Diameter	76 (3) mm (in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	18 (0.71) mm (in)
Magnetic Gap Depth	10 (0.4) mm (in)
Flux Density	0.9 T

Thiele & Small Parameters

Fs	54 Hz
Re	5.8 Ohm
Qes	0.33
Qms	2.9
Qts	0.29
Vas	38 (1.3) dm3 (ft3)
Sd	320 (49.1) cm2 (in2)
Eta Zero	1.8 %
Xmax	+/- 5.5 mm
Xvar	+/- 5 mm
Mms	33 g
Bl	14.1 Txm
Le	1.2 mH

Mounting and Shipping Info

Overall Diameter	262 mm (10.3 in)
Bolt Circle Diameter	245 mm (9.6 in)
Baffle Cutout Diameter	230 mm (8.8 in)
Depth	123 mm (4.8 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Net Weight	6 kg (13.2 lb)
Shipping Weight	6.7 kg (14.7 lb)
Shipping Box	320x320x160 mm (12x12x6.3 in)

- ¹For different impedances, please ask.
- ²2 hours test made with continuous pink noise signal (6 dB crest factor). Power calculated on rated minimum impedance.
- ³Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁴Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

